


2340120045

## SPA-FAIL (MED)

Power failure output relay with potential free contact

For use in MED certified cabinets

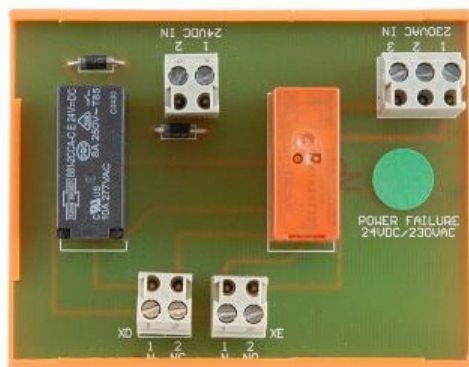

## Description

- ✓ Contact set rated at 230 VAC or 24 VDC
- ✓ Rail mounting NS-35
- ✓ 230VAC / 24VDC input coil
- ✓ Optional rack unit

# Specifications

## GENERAL

Dimension (WxH)	45 x 70 mm
Mounting	Rail mounting NS-35
Housing	ABS, PCB
Operation voltage (input coil)	230 VAC / 24 VDC
Contact rating	230 VAC or 24 VDC
Contact set	2 pcs. C/NO
Terminals	2.5 mm <sup>2</sup>
Fused output	No
Weight	0.1 kg
Operating temperature	-15°C to +55°C
Environmental condition	Protected

## PRODUCT VARIANTS

2340120046	SPA-FAIL-115/24 FAILURE OUTPUT RELAY WITH POT-FREE
2340120047	SPA-FAIL-115/115 FAILURE OUTPUT RELAY WITH POT-FREE
2340120048	SPA-FAIL-230/230 FAILURE OUTPUT RELAY WITH POT-FREE