zenitel

DATASHEET



1000291

UPS-XPC-1900-120T

Tower Online UPS 1900W/30 min, 120V

- Tower Online UPS
- 120VAC
- 1900W / 30 min
- Double-conversion online design

Description

T91 UPS provides double conversion online power for light industrial applications, point of sale, servers and voice & data networks. T91 features unity output power factor to support up to 43% more critical loads than typical UPSs.

- UL, cUL, CE, RoHS, FCC B, FCC A
- T91 provides industry highest real power rating
- Extended battery packs for runtimes up to 4 hours
- Fast Recharge: up to 95% in just 3 hours
- Multiple communications capability
- Load shedding capabilities
- Emergency power off

www.zenitel.com info@zenitel.com

Last revision date: 2025-12-05 09:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Item UPS-XPC-1900-120T consists of:


- 1x T91-3000 (the UPS)
- 1x T91-BP72A (Battery pack)

Technical Dimensions


Consists of:

- 1x T91-3000 (UPS)
- 1x T91-BP72A (Battery pack)


USP FRONT VIEW




USP REAR VIEW




USP SIDE VIEW

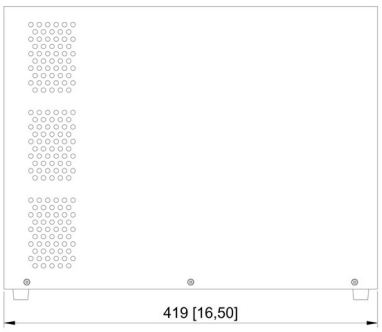


BATTERY FRONT VIEW



BATTERY REAR VIEW



BATTERY SIDE VIEW

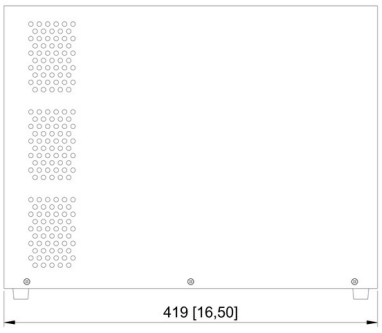

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL

Input Power rating	3000VA (2880W)
Input Voltage	55-150VAC
Input Frequency	50/60Hz auto-sensing
Output Voltage	120VAC nominal (100/110/115/127 selectable)
Frequency	50/60Hz auto-sensing ≤ 1%
Efficiency	Up to 98% ECO Mode and 92% online mode
UPS, Dimensions	7.4" x 16.5" x 12.5" (18.8 x 41.9 x 31.8 cm) (W x D x H)
UPS, Weight	66 lbs (29.94 kg)
Battery type (included)	Up to 30 minutes
Battery Dimensions	7.4" x 16.5" x 12.5" (18.8 x 41.9 x 31.8 cm) (W x D x H)
Battery, Weight	82 lbs (37.19 kg)

Accessories

www.zenitel.com info@zenitel.com Last revision date: 2025-12-05 09:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



UPS-XPC-CARD

Dry Contact Interface Card

Item Number: 2970000204

www.zenitel.com info@zenitel.com Last revision date: 2025-12-05 09:35

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.