



1008116020NL


## TMIS-2NL | Mini Audio Intercom

IP and SIP Mini Intercom - No Logo

- ✓ Robust - 11 gauge stainless steel front plate with one vandal resistant call button, and LED indicators
- ✓ Advanced Audio Technology - High sound pressure levels, automatic volume gain control, and active noise and echo cancellation for superior clarity.
- ✓ ONVIF Conformant - Seamless video and device integration
- ✓ Flexible Installation - Options for wall or flush mounting
- ✓ Seamless Integration - Fully compatible with Zenitel Connect Pro, ICX-AlphaCom, IC-EDGE, and SIP-based systems.

Americas only

 Zenitel ConnectPRO  Emergency points  SIP  ONVIF Conformant  IC-Edge  ICX-AlphaCom


 HD Voice

## Description

The TMIS-2NL is a robust, compact audio intercom module designed for indoor use. Ideal as a communication, information, or emergency point, it connects directly to the IP network for simple deployment anywhere and at any distance. With crystal-clear HD Voice, natural two-way communication, and advanced noise suppression with echo cancellation, it ensures outstanding speech intelligibility even in challenging environments. Built for long-term reliability, the unit is dust- and water-protected and fully compatible with Zenitel's ecosystem, including Zenitel Connect Pro, ICX-AlphaCom, IC-EDGE, and SIP-based systems.

See also: [additional documentation on wiki.zenitel.com](https://wiki.zenitel.com)

## Technical Dimensions

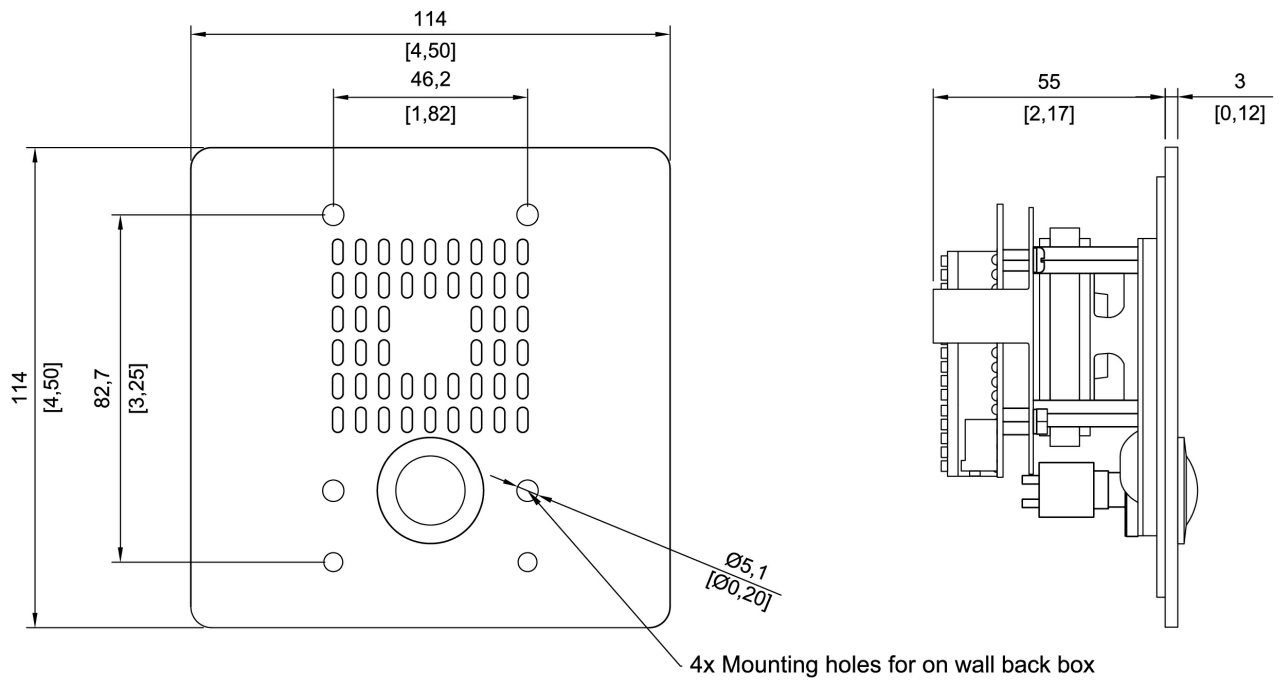



**SPECIFICATIONS:**

Faceplate:	11 gauge, #304 Stainless Steel
Dimensions in inches:	4.5 H x 4.5 W x 2.3 D
Protection Class:	IP 64 with proper installation
Speaker:	2 x 2 square, 45 ohm, 5 watt, waterproof
Power:	Power over Ethernet, IEEE Local Power 24VDC
Indicator:	LED behind translucent red epoxy bonded Lexan lens
Mounting:	Surface or Flush, depth of 2.5" required
Connectors:	1 RJ45 (Ethernet) 10/100 Mbps 6 I/O's 1 Relay Contact
IP Protocols:	IP v4, TCP, HTTPS, TFTP, RTP, RTCP, DHCP, SNMP, DiffServ, TOS, ONVIF, CCoIP
LAN Protocols:	Power over Ethernet (IEEE 802.3 a-f ), VLAN (IEEE 802.1pq), Network Access Control (IEEE 802.1x)
Audio Technology	Wideband 200 Hz – 7 kHz (G.722) Telephony 3.4 kHz (G.711) Acoustic Echo Cancellation Open Duplex Adapter Jitter Buffer 10 Watt Class D Amplifier Electret Microphone
Management and Operation:	HTTPS (Web Configuration) DHCP and static IP Remote Software Upgrade Centralized Monitoring Status LED
Remote Control:	6 I/O's tool less and one relay contact
Operating temperature range	-25° to 70° C / -13° to 158 ° F
Storage temperature range	-25° to 70° C / -13° to 158 ° F
Warranty	3 Years standard warranty

# Accessories



## TA-13

Turbine Mini On-Wall Back Box  
White

Item Number: 1008140130



## TA-2

US 2-Gang 3 1/2" Deep Backbox

Item Number: 1008140020



## TA-3

2 1/2" Deep Flushmount Backbox for  
Turbine Compact & Mini

Item Number: 1008140030