

1021001200

VSS-SP

VSS Slave Panel - V2 This item has been replaced by Phontech Sound Reception System






This product will be replaced by the equivalent Phontech solution, but Zenitel will honor prior commitments given to the market. Therefore, we will continue to provide expansion and spare-part service for this product.



Description

- ✓ Flush Mounting
- ✓ Brushed aluminum with foil
- ✓ Operation voltage 24V DC
- ✓ Adjustable volume
- ✓ Adjustable dimmer
- ✓ Override function
- ✓ 8 Indicator LEDS
- ✓ NEW: Reverse LED indication functionality. See manual for details. From revision 2.05

Technical Dimensions

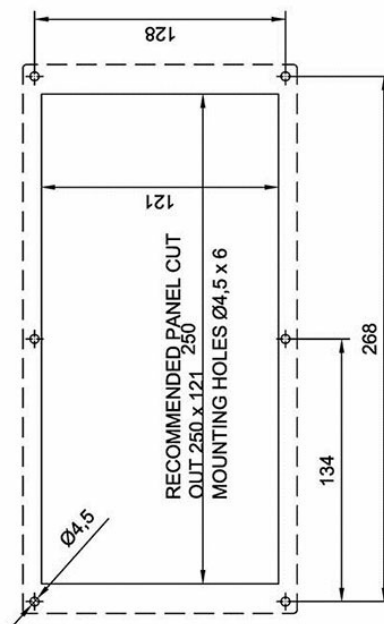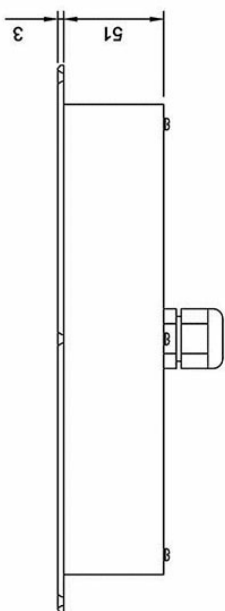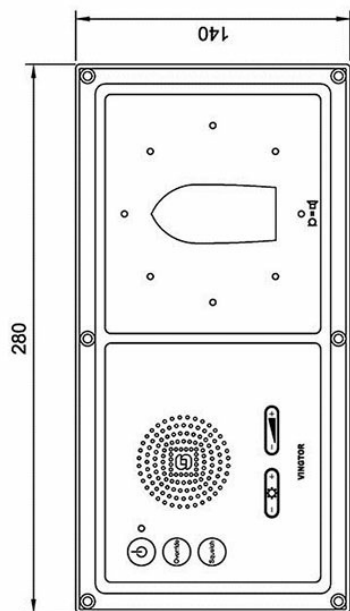

Specifications

GENERAL

Dimensions (WxHxD)	280 x 140 x 51 mm
Power	Internal from the master panel
Mounting	Flush
Housing	Brushed aluminum with foil
IP rating	IP-22
Operation voltage	24V DC
LEDs	8
Buttons	Override, Dimmer, Volume
Weight	0.7 kg

Used With



VSS-MP

VSS Master Panel - V2 This item has been replaced by Phontech Sound Reception System