










1008132020

TKIE-2

Turbine Extended IP Kit



-  ICX-AlphaCom
-  Exigo
-  Turbine
-  Automatic Volume
-  HD Voice
-  Automatic Gain Control
-  Active Noise Cancelling
-  Open Duplex
-  Voice Activity Detection

DESCRIPTION

The TKIE-2 is the extended version of our Turbine Kit range and our most flexible integration platform. It offers the same high quality audio as the TKIS-2 kit, and adds to the feature list with an extra RJ45 port for dual Ethernet connectivity, dual relays, and a header for easy connection of audio in and outputs, such as line-level inputs/outputs and audio accessories such as headsets/handsets.

The TKIS/TKIE range can be used as a point of integration for AlphaCom and Exigo systems towards legacy PAGA, radio systems, analogue PABX, etc.

The TKIE-2 offers I/O and signal relays. For high-power switching applications, the TKIE-2 may be complemented with the TA-10 Relay Module which offers 2 DPDT relays suited for high-voltage/high-current loads.

FEATURES

- IP station kit with extended functionality
- Dual RJ45 for Ethernet connectivity (with switch)
- Dual relays (DPDT)
- 6 configurable I/Os (input, output or LED-driving)
- Line-in/Line-out connectivity for connection to audio devices
- Header for connecting audio accessories
- Possibility for connecting high-power relay module (TA-10)
- High quality Turbine™ class output with 10W amplifier
- Full open duplex and digital noise reduction
- Metal enclosure suitable for DIN-rail mounting

See also: [additional documentation on wiki.zenitel.com](https://wiki.zenitel.com)

Created: 19.05.2020, updated: 02.02.2021

page 1/4

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.


ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel - All rights reserved.

OTHER SPECIFICATIONS

IP address information	Speaks IP address after system boot (requires connected loudspeaker)
Dimensions (HxWxD)	74 x 106 x 30 mm / 2.9â€ x 4.2â€ x 1.2â€
Weight	0.1 kg / 0.2 lbs
Encapsulation material	Steel

[Export Table Data](#)

TECHNICAL DIMENSIONS

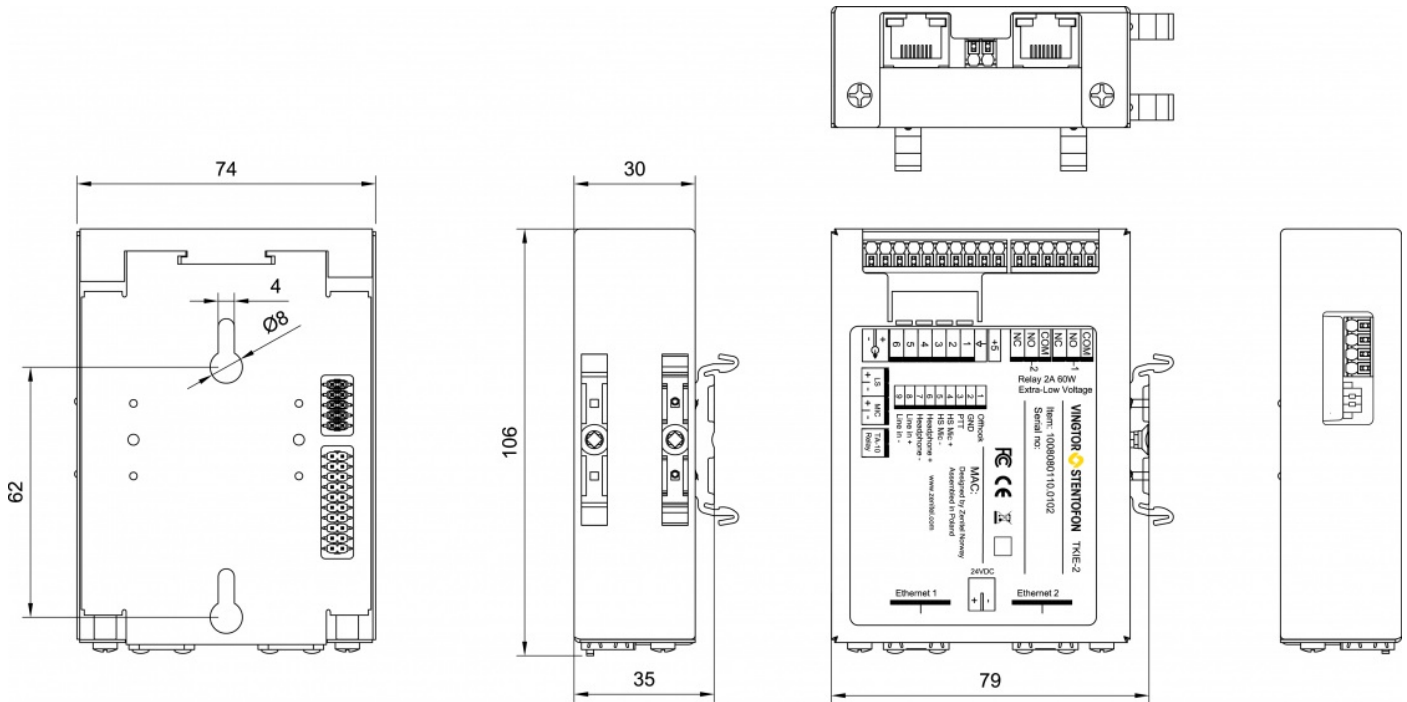

ACCESSORIES



TA-10

Item number: 1008140100



TA-16

Item number: 1008140160



TA-17

Item number: 1008140170

USED WITH



1023122061

ENA2060-DC1

Exigo Network Amplifier 2 Channels, 60W for Rolling Stock

Created: 19.05.2020, updated: 02.02.2021

page 3/4

www.zenitel.com

info@zenitel.com

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel - All rights reserved.

