

1020600943

## VSP-223-L

Main Station - Batteryless Telephone System - 12-Way



- 12 extensions selector switch
- Built-in relay latch timer for activation of external visible or audible 24V DC signal units
- Alarm stop button
- Noise compensated microphone
- Optical LED call indication at front (in addition to audible call signal)
- Flush mounted
- Wall mounting with corresponding metal cabinet type MBOKS
- Desk mounting with corresponding wooden cabinet type VSPK
- Suitable for installation in control rooms and noisy areas like steering gear, engine- and thrusterrooms, etc

### DESCRIPTION


VSP-223-L is a batteryless telephone requiring no external power supply and fulfils the demands for emergency communication between vital positions. The unit is tested and type approved for internal communication for marine vessels.

# SPECIFICATIONS

## GENERAL

Connections	Screw terminals
Color	Black
IP rating	IP-44
Dimensions (WxHxD)	238 x 130 x 77 mm
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C
Switching Current (max)	8 A

## TECHNICAL DIMENSIONS

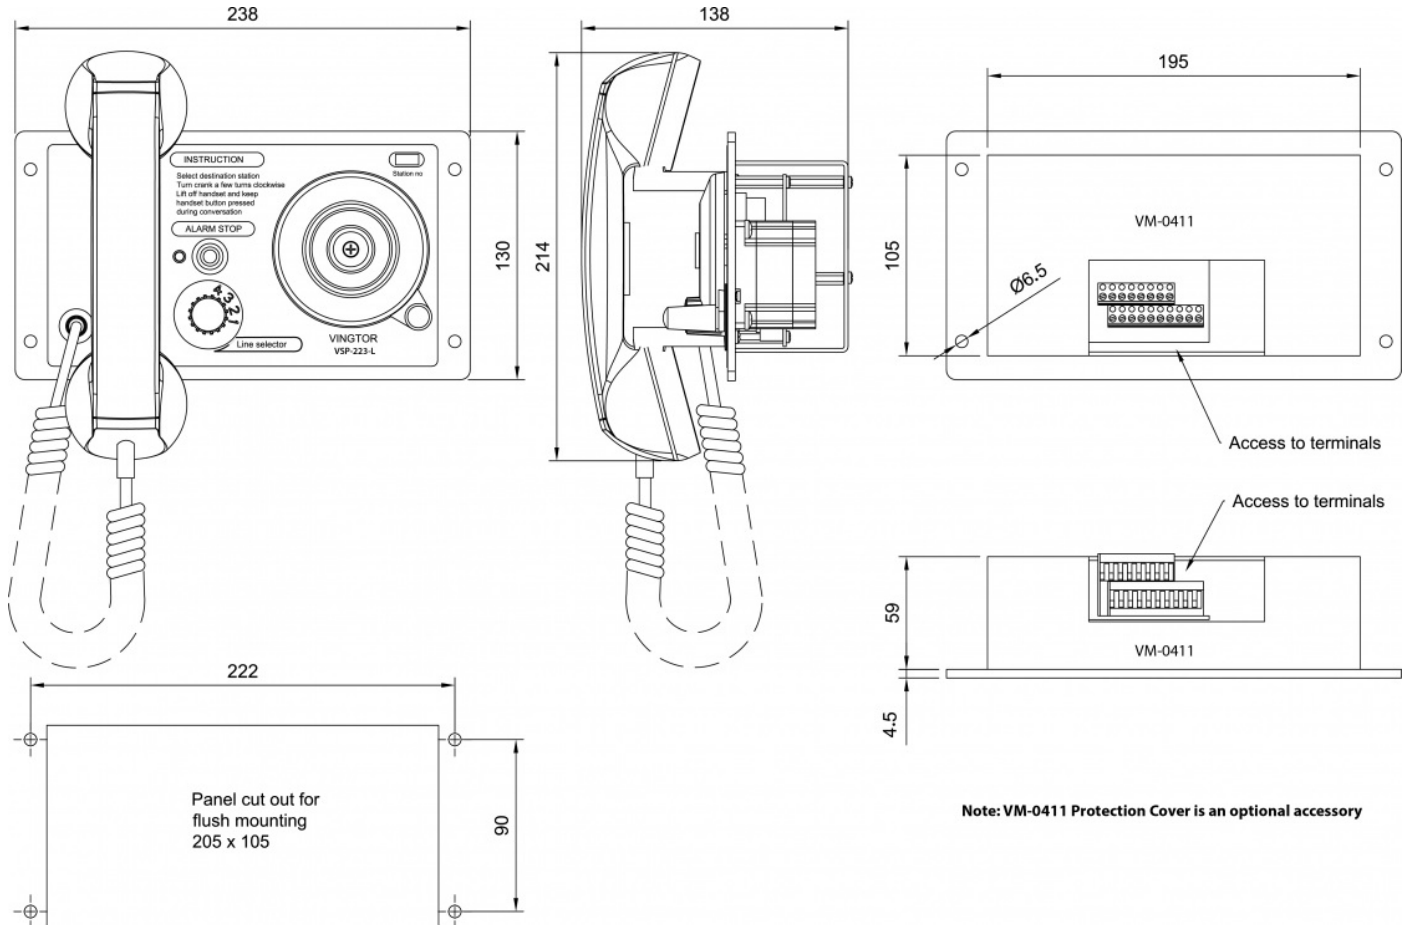

**Note: VM-0411 Protection Cover is an optional accessory**

## ACCESSORIES



**VM-0411**

Item number: 3006090492



**MBOKS**

Item number: 3006090478



**VSPK**

Item number: 3006200049



**VSP-36-PEL-A**

Item number: 1020600771



**VSP-36-PEL-A/20**

Item number: 1020600772



**CD-4**

Item number: 1020159000



**VSP-36-PELP-A**

Item number: 1020600773



**VSP-36-PELP-A/20**

Item number: 1020600774



**VSP-36-PELP-A/25**

Item number: 1020600775



**IRR-24**

Item number: 3006202045



**IRR-VSP-220**

Item number: 1020600995