

3006200039

## VSP-5004/2

Ex Buffer Unit w 2x Zener Barrier






### DESCRIPTION


- Intrinsically safe buffer unit for mounting in safe area
- Supports up to 12 substations - VSP-512
- 4x 24V DC outputs to Ex signal units
- 4 call signal outputs to safe area
- Delivered in a metal cabinet for wall mounting
- Delivered with 2x zener barriers for 24V DC sounder in zone 0.

## SPECIFICATIONS

Dimensions (WxHxD)	450 x 300 x 200 mm
Mounting	Wall mounted
Weight	11.0 kg
Housing	Steel cabinet
Color	Beige / RAL 7032
Cable entry	Pre-cut cable inlet in bottom
Connections	Screw terminals
Operation voltage	24V DC
Power Consumption	10W (max)
Protection mode	Ex II (1) G EEx ia IIC T6
Certificate	Presafe 15 ATEX 6475 / IECEx PRE 15.0024
IP-rating	IP-44

## TECHNICAL DIMENSIONS

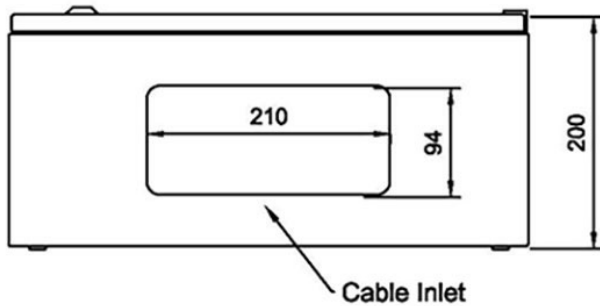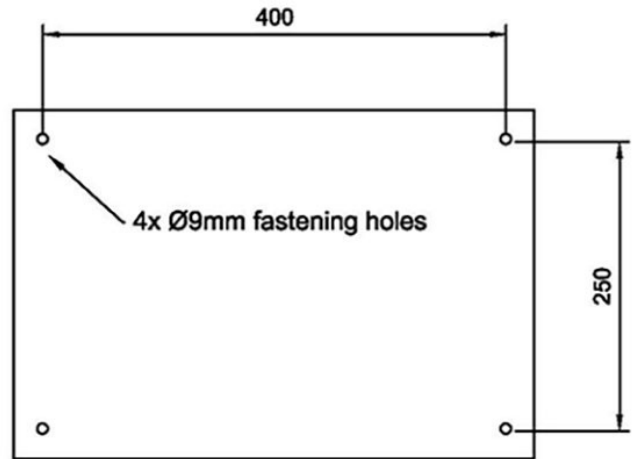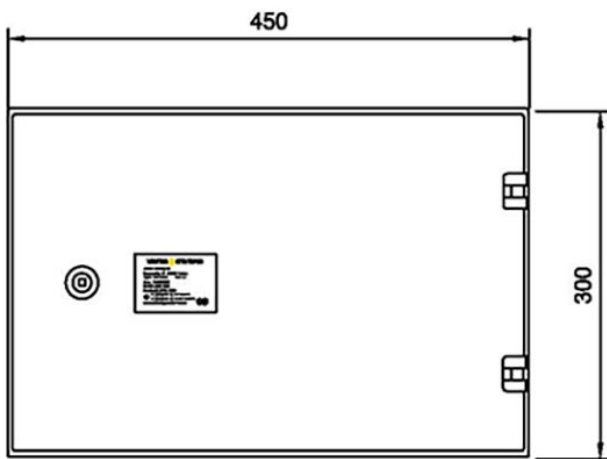

 ATEX Approved product
Certification body Nemko
Certificate no. Nemko: 05 ATEX 1059
Protection system II (1)G [EEx ia] IIC Ta: 60°C

## USED WITH



3006200044

VSP-512

Intrinsically Safe Operating Unit