

PRODUCT SHEET

TCIV-6 VoIP Station with Video, Scroll Buttons & LED Display

Communication is always a critical component for any type of business you run or service you provide. Vingtor-Stentofon specializes in providing intelligent communication solutions in environments where a standard VoIP telephone cannot be used.

Our products address three key requirements:

- Dynamic noise is very common and can easily interfere with audio quality. How to provide crystal-clear communication in these environments – when you need it, where you need it and every time you need it?
- How will these products behave on my existing communication platform? Your technicians want a product that is easy to configure, deploy and maintain. Your network administrators want a product that is secure and stable.
- You want a product that uses standard open network protocols to ensure that the solution you offer today remains versatile and highly scalable.


The TCIV-6 station addresses these key requirements by combining state-of-the-art components with intelligent software algorithms and a functional design.

This particular unit is designed for demanding, outdoor environments and is rated IP-65 and IK08. Click [here](#) for more technical information on this product.

Instead of paper labels, this versatile unit uses a LED display with scrolling buttons to select from a list of contacts. The display and contact list are easily managed using a web browser. The elegant and timeless design also meets ADA requirements.

Our units use the SIP protocol and support G.711, G.722 and G.729.

A custom-built video camera will stream video in MJPEG (480p) or H.264 over the same IP address used for the audio stream.

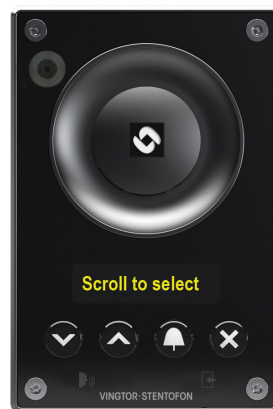


TCIV-6 front



TCIV-6 back

Key Qualities:

- ONVIF Profile S conformant
- Open Duplex at 95dB, thanks to anechoic speaker design and rigid aluminum frame
- Active Noise Reduction (up to 30dB) and Automatic Volume Control allow you to hear, be heard and understood in high-noise environments
- Digital MEMS microphones to capture a much wider spectrum of the human voice, which results in superior audio processing
- Class-D 10W amplifier with matching 10W speaker allows you to broadcast at up to 105dB
- Supports a wide set of IP Protocols (SIP, SNMP, HTTP, TFTP, Syslog)
- Can configure the units using a standard web browser or, to save time, in bulk, using a dedicated software tool
- Control relay and I/Os over IP
- Powered via PoE or local 24-48 VDC
- Can upload custom audio messages for improved user experience
- Meets ADA requirements
- Can change LED Label and address book using a web browser

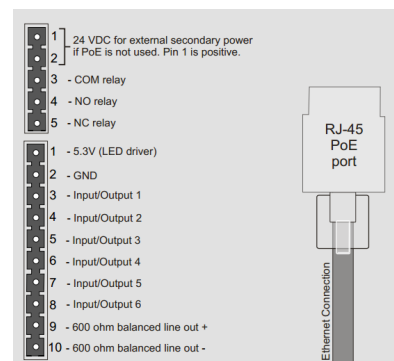

TCIV-6 connectors

PoE


SNMP

10W

SIP


ACTIVE NOISE CANCELLATION

IP 65

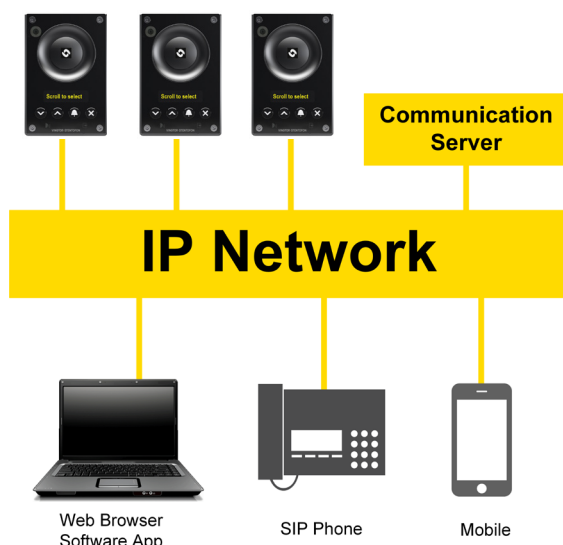

Value to the customer

- Expand the communication platform beyond the physical limitations of traditional office telephony equipment.
- Provide Intelligible HD Voice Audio in demanding industrial environments.
- Deliver Audio and Video (MJPEG or H.264) over a single IP address.
- Use these communication points both for two-way communication and paging.
- Use custom audio messages to better inform users.
- Manage and operate from your existing communication platform, no need to run a separate parallel system.
- Use the full benefits of IP technology with open, familiar protocols for maintenance and reporting.
- Powerful onboard processing for audio, IP signal and integration through relays and I/Os.
- LED labels will not fade over time and are easily updated using a web browser.



Acoustic Echo Cancellation: A rigid design, 10W speaker and amp and digital MEMS microphones make it possible for open duplex, hands-free communication up to 95dB.



Auto Volume Control: A voice that is too loud or too soft will be adjusted to an intelligible signal. The speaker volume will be automatically adjusted to an audible level, depending on the ambient noise levels.



Active Noise Reduction: Our stations will detect the voice and amplify that signal, while suppressing up to 30dB of background noise.

Accessories

1008140010 - TA-1 TURBINE COMPACT ONWALL BOX

Size (WxHxD): 120 x 180 x 62 mm



[More information on TA-1](#)

1008140050 - TA-5 BRACKET FOR US 2 GANG DOUBLE DEPTH BACK BOX

Size (WxHxD): 109 x 169 x 10 mm



[More information on TA-5](#)

VINGTOR-STENTOFON by Zenitel

Communication is critical in all areas of business; therefore, our expertise is focused on providing intelligent communication solutions that allow you to hear, be heard and be understood, every time.

Zenitel systems interface with other security systems including CCTV, access control and alarm for a comprehensive security solution.

Our primary system offering is within Public Address, Intercom and Radio. Our key markets include: Building Security, Public Safety, Transportation, Industrial Manufacturing, Energy and Maritime.

Zenitel systems provide high availability, scalability, reliability, maintainability, and cyber defensibility. By reducing hardware to a minimum, and keeping the benefits of centralized server management, organizations have more flexibility in scale and performance.