

3005010161

SPA-M6S-V2

PA Panel Single w/6 zones

REPLACED BY

 [2340110020 - SPA-M6-V2](#)




Description

- PA-panel for single system
- Delivered with gooseneck microphone
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- ALL, TALK and dimmer buttons. Talk button on panel
- Replaceable text label to each zone button
- Zone buttons have activation confirmation light
- Flush mounting, back box for wall mounting is available
- Local mute contact for external loudspeaker (From hardware version 4.0)


This Vingtor-Stentofon Panel gives messages in one to six zones in a SPA-V2 public address and general alarm single system. Installation in consoles or on-wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available from hardware version 4.0. This function must be in combination with relay box

Technical Dimensions

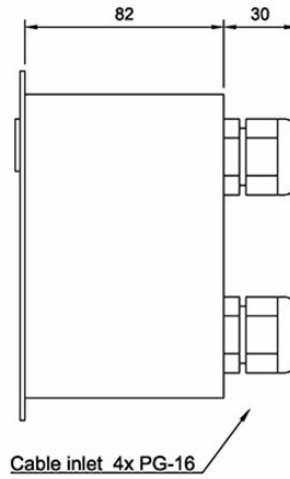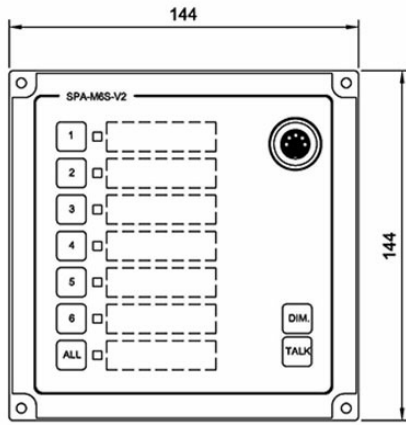

Cable inlet 4x PG-16

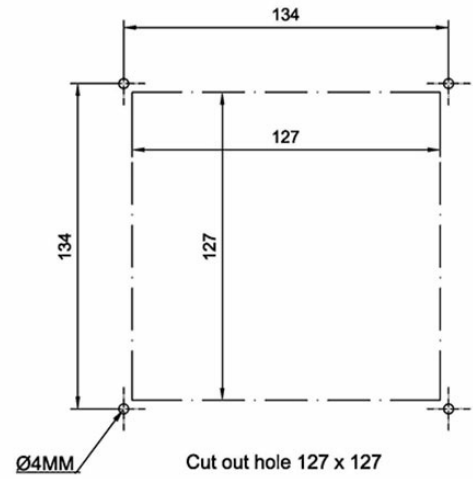

Ø4MM

Cut out hole 127 x 127


Related item:
 Wall mounting box
 SPA-M6BOKS
 O.No. 3005010155

Specifications

GENERAL

Size (WxHxD)	144 x 144 x 82
Weight w/microphone	0.6 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775mV 0dB
Sensitivity microphone	2K / 4mV
Connections	Plugable screw terminals for 2.5 mm ² cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm ²
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44

Accessories



SPA-M6BOKS

Wall-mount box for SPA-M1/M6 and VM15/50-RD panels

Item Number: 3005010155



IRR-3

Relay Box

Item Number: 1020600992