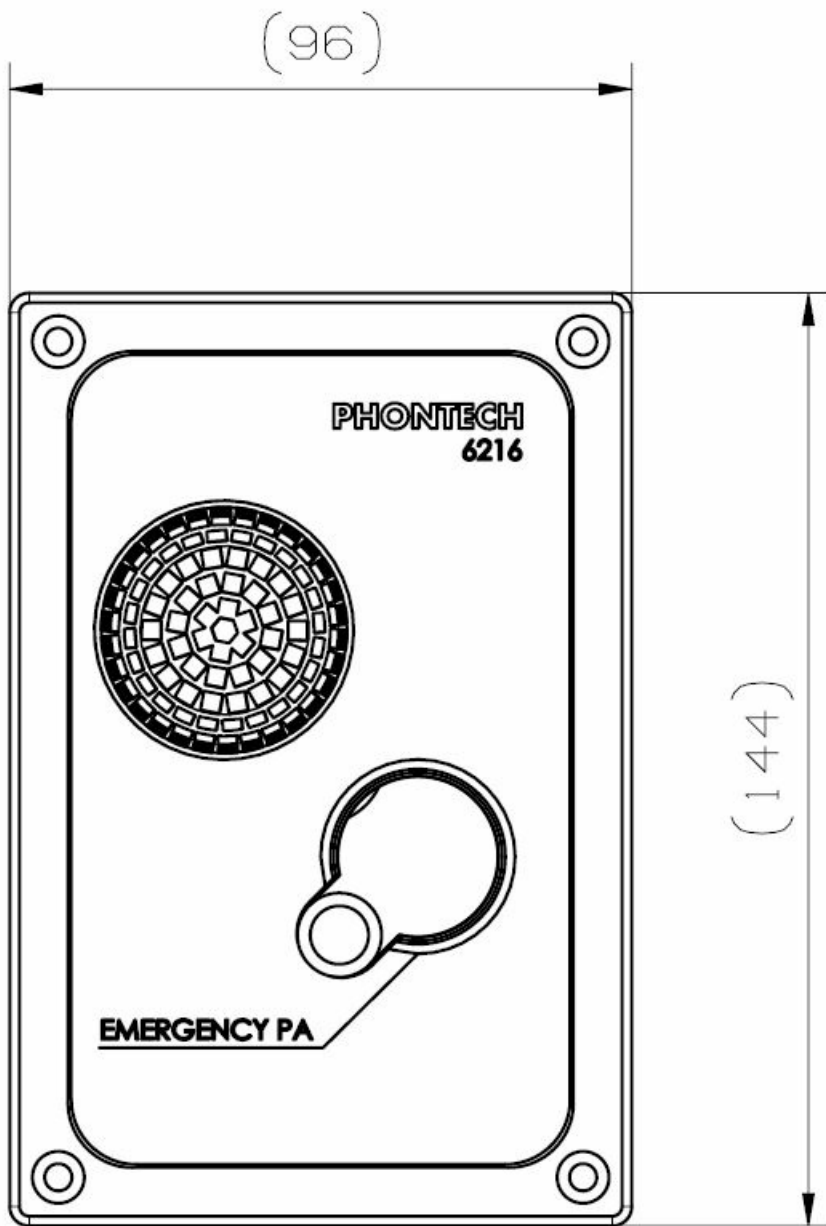4000100040

P-6216

Emergency PA Unit

- ✓ Noice canslling microphone
- ✓ Closing contact (PTT)
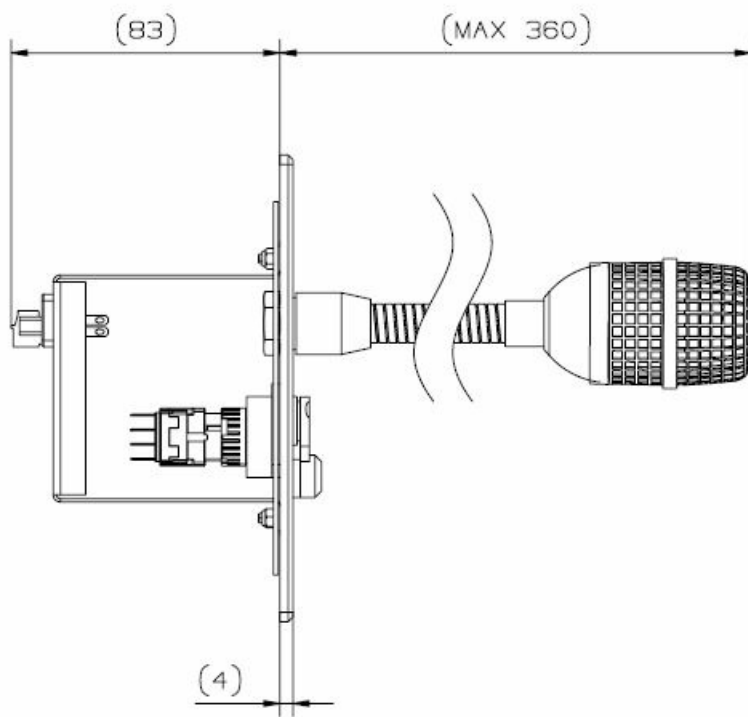
- ✓ Works with MPA 1600 & ICS 6200
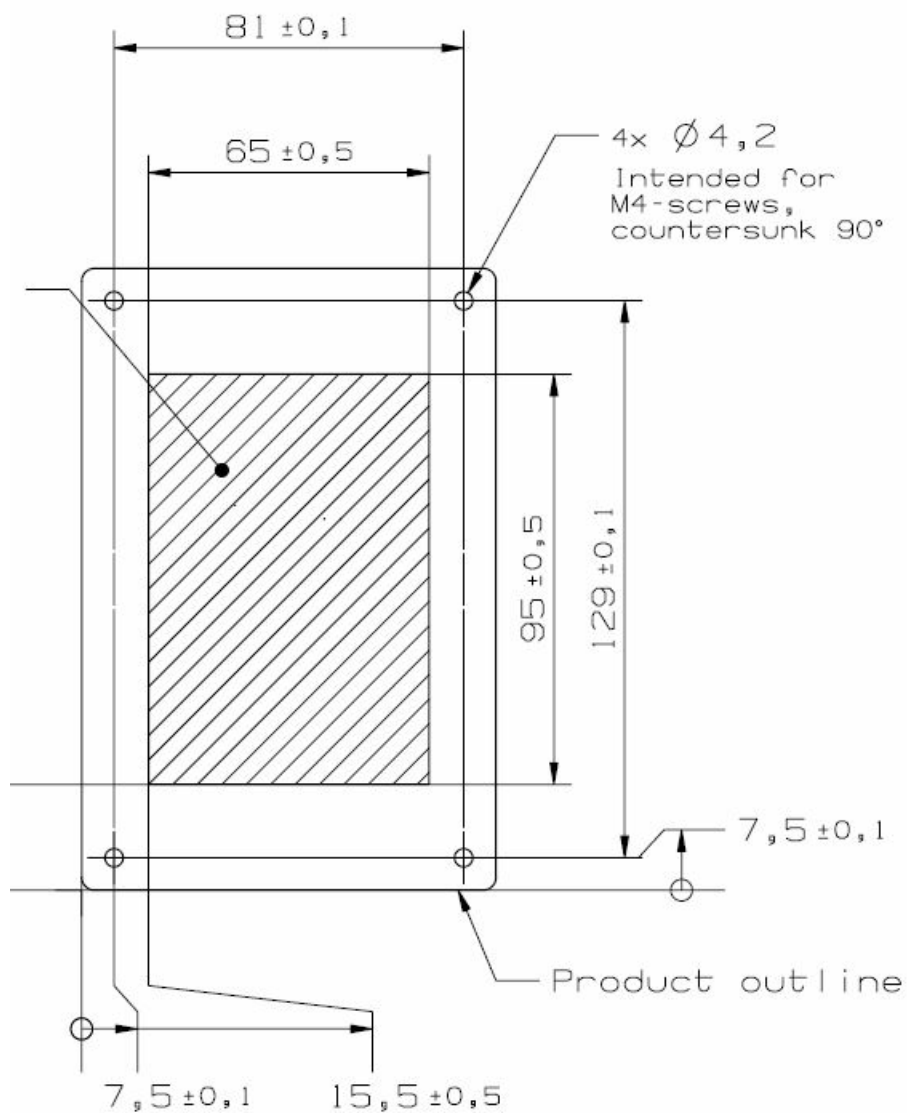
Description

The P-6216 Emergency PA Unit can be used together with the MPA 1600 system as well as the PA part of a combined intercom PA system ICS 6200.

The unit consists of a noise-cancelling microphone and an emergency PA button with a protective cover against unintended activation.

Technical Dimensions
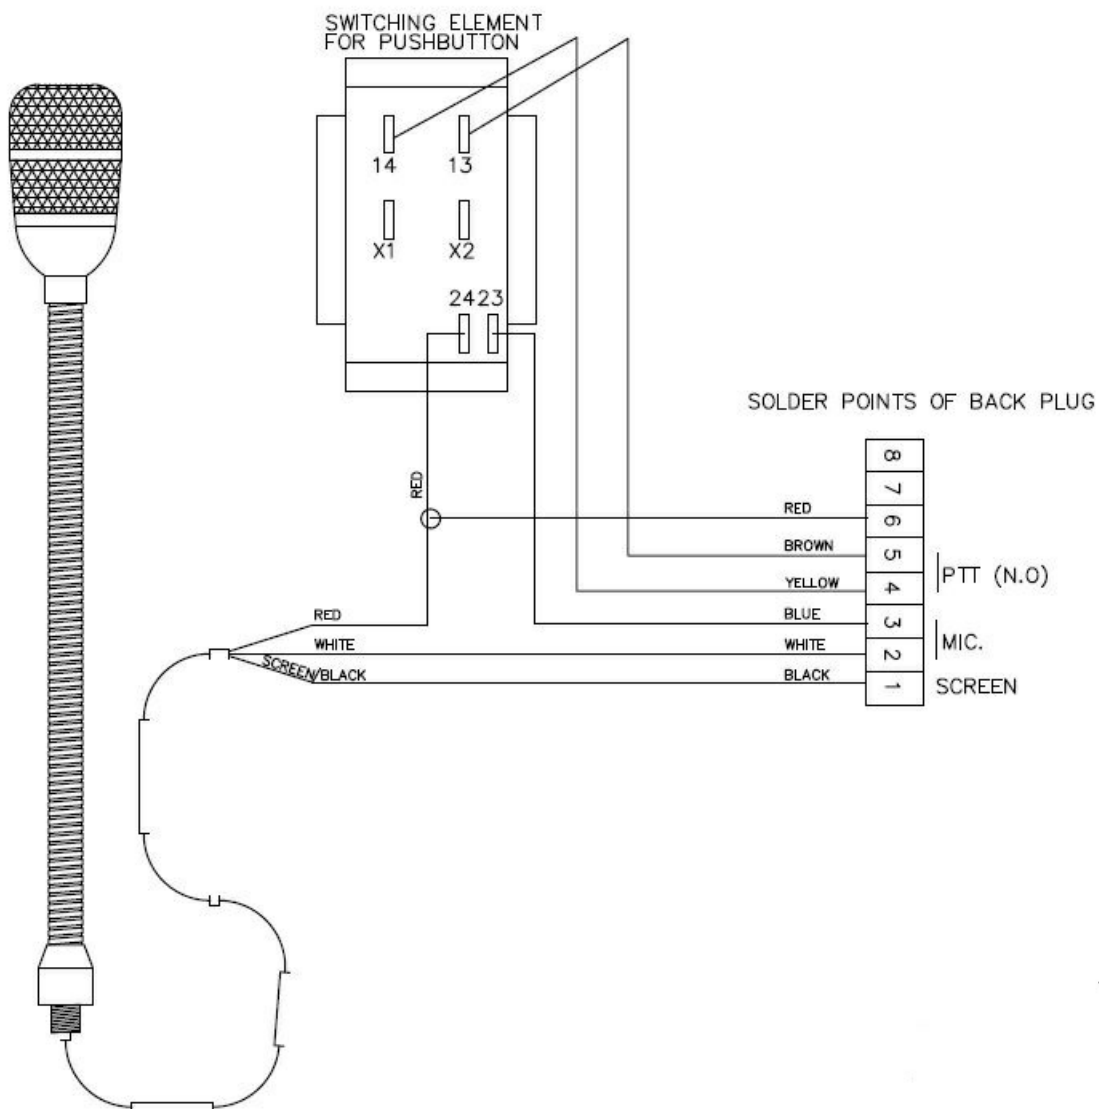
www.zenitel.com   info@zenitel.com

(96)

PHONTECH
6216

(144)

EMERGENCY PA

(83) (MAX 360)

(4)

81 ±0,1

65 ±0,5

4x Ø4,2
Intended for
M4-screws,
countersunk 90°

95 ±0,5

129 ±0,1

7,5 ±0,1

Product outline

7,5 ±0,1

15,5 ±0,5

Specifications

MECHANICAL

Dimensions (WxHxD)	120x80x70 mm
Weight	0.3 kg

Notes:
1. Visual appearance of microphone may differ from this drawing.
2. Cover soldered joints with shrink tube.

Pin	Signal
1	SCR
2	MIC
3	MIC
4	PTT
5	PTT
6	MIC
7	-
8	-

Used With

ICS 6200

Central Unit

Compact ICS

Integrated Communication
System

P-1600 MPA Central
Unit

www.zenitel.com   info@zenitel.com