

2340110021

SPA-M6-D

PA Panel Dual with 6 Zones, All Call, Dimmer, Flush



Onboard communication



- PA panel for dual system
- Built-in pre-amplifier with preset signal level and tone controls
- 6 zone selection buttons
- ALL, TALK and dimmer buttons.
- Replaceable text label to each zone button
- Zone buttons have activation confirmation light
- Flush mounting, back box for wall mounting is available
- Local mute contact for external loudspeaker

DESCRIPTION

This Vingtör-Stentofon Panel gives messages in one to six zones in a SPA-V2 public address and general alarm dual system. Installation in consoles or on-wall indoor.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. This function must be in combination with relay box.


Note: Microphone must be ordered separately.

SPECIFICATIONS

GENERAL


Size (WxHxD)	144 x 144 x 82 mm
Weight w/microphone	0.6 kg
Material	Black anodized aluminium
Mounting	Flush, wall with use of back box
Output signal	0.775Vrms / 0dB
Connections	Plugable screw terminals for 2.5 mm ² cable
Cable glands	4 x PG-16
Cable size	6 x 2 x 0.75 mm ²
Local mute relay, output	24V DC @ maximum 50mA
IP-rating	IP-44
Operating temperature	-15°C to +55°C

TECHNICAL DIMENSIONS

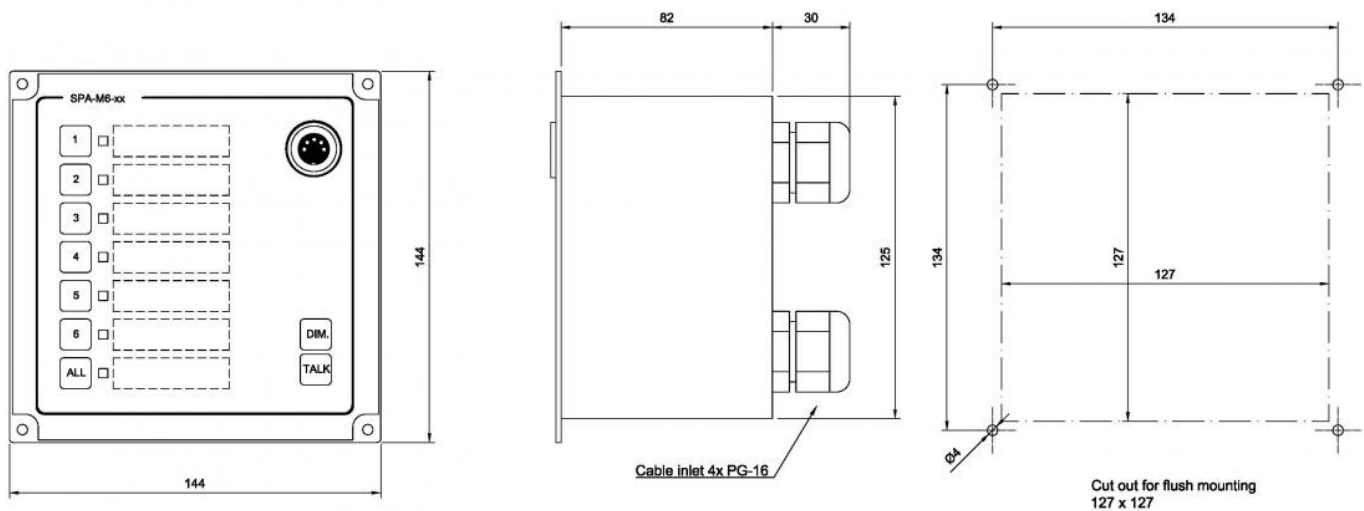

Related item:
 SPA-M6BOKS Wall mounting box for SPA-M1/M6 panels Item.no. 3005010155
 MB-30G Gooseneck Microphone Item.no.3005020033
 ETC-1-TB Hand Microphone Item.no.3005020029

ACCESSORIES



SPA-M6BOKS

Item number: 3005010155



MB-30G

Item number: 3005020033



ETC-1-TB

Item number: 3005020029



PAM2H

Item number: 1023533013