1490004010

ITSV-4

HD-IP-Videotelefon mit 5-Zoll-Bildschirm

- 16 Leitungen mit bis zu 16 SIP-Konten
- 5,0 Zoll (1280 × 720) kapazitiver 5-Punkt-Touchscreen HD TFT LCD
- Integrierte, neigbare 2-Megapixel-CMOS-Kamera mit Sichtschutz, 720p 30fps
- 10-Wege-Audiokonferenz- und 3-Wege-Videokonferenzfunktion
- HD-Freisprecheinrichtung mit zwei Mikrofonen, Rauschunterdrückung, erweiterter Echounterdrückung und hervorragender Doubletalk-Leistung
- 4-Kern 1,8 GHz ARM Cortex A55 Prozessor mit 2 GB RAM und 16 GB eMMC Flash

Zenitel Connect | Video Intercom | SIP | Bluetooth | IC-Edge | ICX-AlphaCom | Audio | HD Voice | Video | H.264

Beschreibung

Das ITSV-4 ist ein leistungsstarkes Desktop-Videotelefon mit Android 11, einem kapazitiven 5-Zoll-Touchscreen, neigbarer Kamera, HDMI-Ausgang, zwei Mikrofonen und Unterstützung für 720p HD-Video. Das ITSV-4 bietet erweiterte SIP-Telefoniefunktionen und ist sofort einsatzbereit mit unseren IP-Intercom-Plattformen IC-EDGE und ICX-AlphaCom integrierbar.

Weitere Informationen finden Sie im Zenitel Wiki.

Technical Dimensions

www.zenitel.com info@zenitel.com Last revision date: 2026-09-29 10:07

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

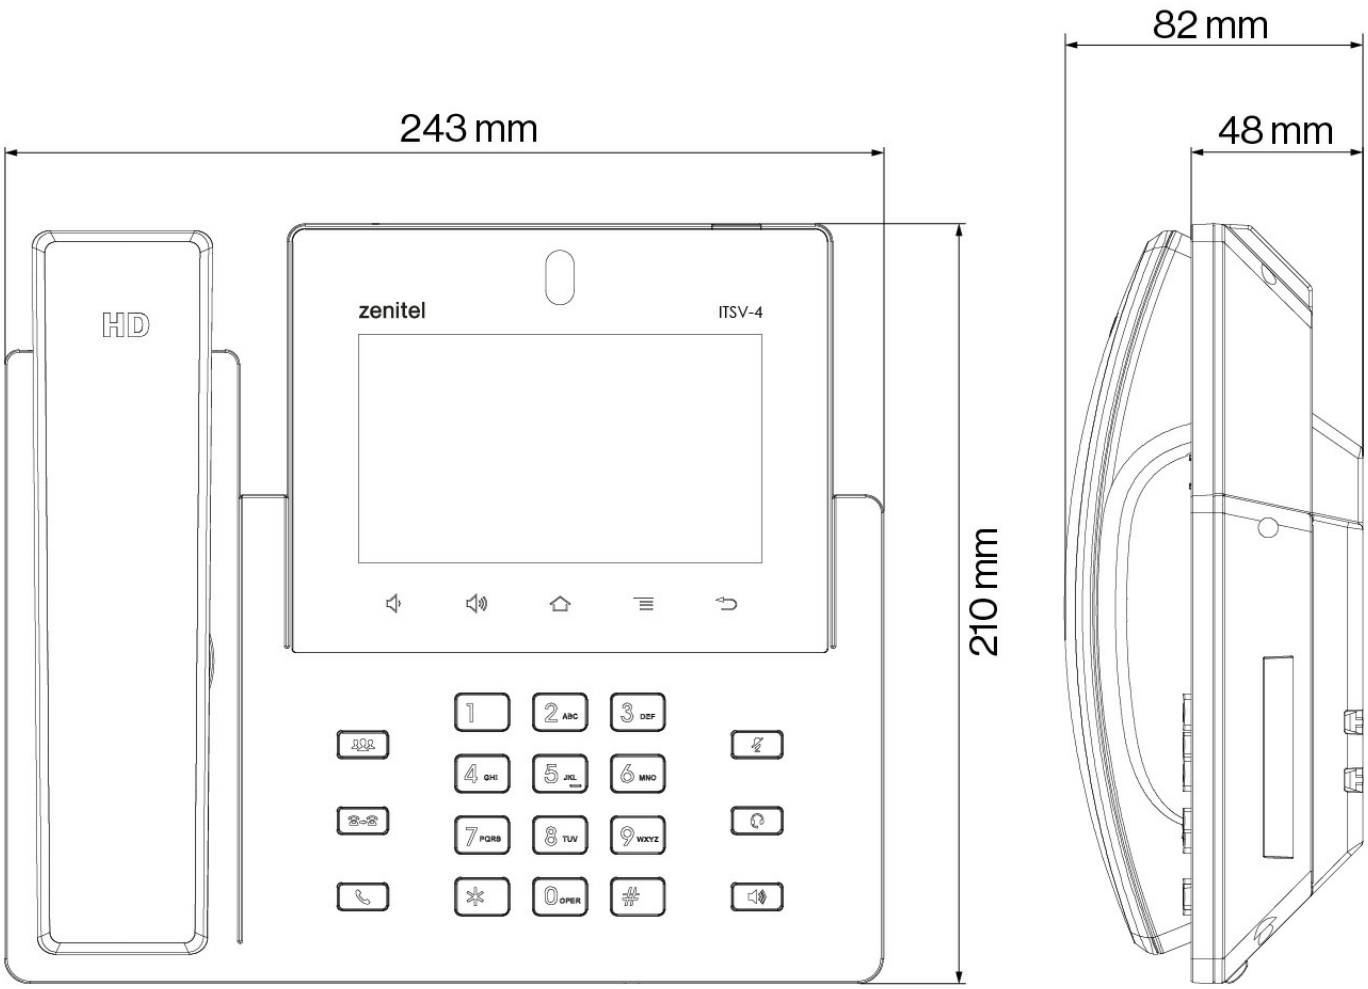

www.zenitel.com info@zenitel.com Last revision date: 2026-09-29 10:07

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Spezifikationen

SPEZIFIKATIONEN	
Grafikdisplay	5,0 Zoll 1280×720 kapazitiver Touchscreen (5 Punkte) HD TFT LCD
Kamera	Integrierte, neigbare 2-Megapixel-CMOS-Kamera mit Sichtschutzrad, 1080p 30fps
Zusatzanschlüsse	RJ9-Headset-Buchse (ermöglicht EHS mit Plantronics-Headsets), Erweiterungsmodul-Anschluss, USB 2.0-Anschluss, USB 3.0-Anschluss
Funktionstasten	11 Funktionstasten für KONFERENZ, ÜBERTRAGEN, SENDEN/WAHLWIEDERHOLUNG, STUMM, KOPFHÖRER, FREISPRECHEINRICHTUNG, LAUTSTÄRKE -/+. 3 dedizierte Android-Tasten für HOME, MENÜ und ZURÜCK
Video-Codec	H.263, H.264 BP/MP/HP
Videoauflösung	Bis zu 720p
Videobildrate	Bis zu 30 fps
Betriebstemperaturbereich	0 °C bis +40 °C
Lagertemperaturbereich	-10˚C bis +60˚C
Relative Luftfeuchtigkeit	10 % – 90 % nicht kondensierend
Energieoptionen	Power over Ethernet (PoE & PoE+) oder Netzteil.
Stromversorgung über Ethernet	802.3af Klasse 3, 802.3at Klasse 4
Netzteil	Eingang: 100–240 V AC, 50–60 Hz; Ausgang 12 V DC, 1,5 A
Netzwerkschnittstelle	2 x RJ45 (Ethernet) 10/100/1000 Mbit/s mit integriertem PoE/PoE+
Bluetooth	Integriert, Bluetooth 5
W-lan	Integriert, Dualband 2,4 & 5 GHz mit 802.11 a/b/g/n/ac
Sicherheit	Passwörter auf Benutzer- und Administratorebene, zufälliges Standard-Administratorpasswort, MD5- und MD5-Sitzungsbasierte Authentifizierung, 256-Bit-AES-verschlüsselte Konfigurationsdatei, TLS, SRTP, HTTPS, 802.1x-Medienzugriffskontrolle, Secure Boot gegen Hackerangriffe
Protokolle/Standards	SIP RFC3261, TCP/IP/UDP, RTP/RTCP, HTTP/HTTPS, ARP, ICMP, DNS (A-Eintrag, SRV, NAPTR), DHCP, PPPoE, SSH, TFTP, NTP, STUN, LLDP-MED, LDAP, TR-069, 802.1x, TLS, SRTP,

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

	IPv6, OpenVPN®
Audiotechnik	Breitband-Opus, Breitband-G.722, G.711µ/a, G. 729A/B, G.726-32, iLBC, In-Band- und Out-of-Band-DTMF (In-Audio, RFC2833, SIP INFO), VAD, CNG, AEC, PLC, AJB, AGC, ANS, Noise Shield 2.0
Sprachenunterstützung	Englisch, Deutsch, Italienisch, Französisch, Spanisch, Portugiesisch, Russisch, Kroatisch, Chinesisch, Koreanisch und Japanisch
Einhaltung	FCC: Teil 15 (CFR 47) Klasse B; UL 60950 (Netzteil); Teil 68 (HAC) CE: EN55022 Klasse B, EN55024, EN61000-3-2, EN61000-3-3, EN60950-1, EN62479, RoHS RCM: AS/ACIF S004; AS/NZS CISPR22/24; AS/NZS 60950; AS/NZS 4268 Sicherheit
Abmessungen (BxLxH)	243 x 210 x 48 mm
Gewicht	1 kg
Garantie	2 Jahre Standardgarantie, verlängerbar auf insgesamt 5 Jahre (Aufpreis)

Zubehör

Wall Mount Bracket for ITSV-4

Artikelnummer 1490009006

Used With

TCIV-2+ I Video-Sprechstellen

IP- und SIP-Video-Sprechstellen

Artikelnummer 1008315020

TCIV-3+ I Video-Sprechstellen

IP- und SIP-Video-Sprechstellen

Artikelnummer 1008315030

TCIV-5+ I Video-Sprechstellen

IP- und SIP-Video-Sprechstellen

Artikelnummer 1008315050

TCIV-6+ | Video-Sprechstellen

IP- und SIP-Video-Sprechstellen

Artikelnummer 1008315060

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

TKIV+ Video-Sprechstellenmodul

Turbine Video - VoIP-Intercom-Modul

Artikelnummer 1008331010

TEIV-4+ | Video-Türsprechanlage mit RFID-Kartenleser

IP- und SIP-Video-Türsprechanlage mit RFID-Kartenleserplatz

Artikelnummer 1008318240

TEIV-1+

Turbine Extended IP-Video-Sprechanlage mit Tastenfeld

Artikelnummer 1008317110

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.