

3005010197

SPA-W1-D

Dual Weatherproof PA Panel



IP66

Description


- Weatherproof PA panel for dual system
- Built-in pre-amplifier with preset signal level and tone controls
- Requires microphone with PTT
- Plug for WP handheld microphone P-66 or P-66/10
- Wall mounting outdoor / Indoor
- Local mute contact for external loudspeaker (from hardware version 4.0)

This waterproof panel gives All Call Message in a SPA-V2 public address and general alarm dual system.

Local mute function is used to break audio to loudspeakers where proximity to pa panel cause feedback. Available

page 1/3

Technical Dimensions

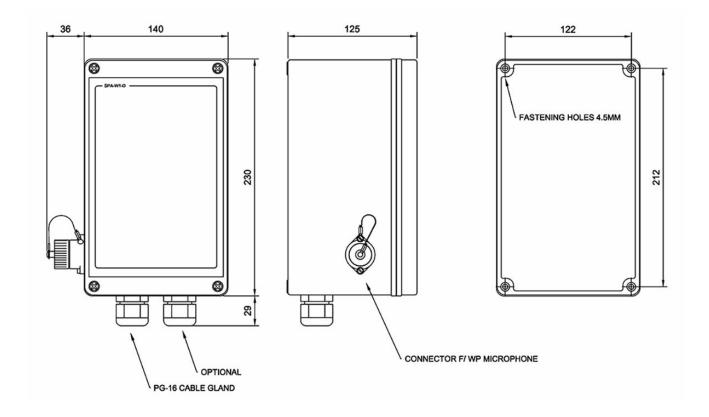

page 2/3

Specifications

GENERAL

Size (WxHxD)	140 x 230 x 125
Weight	0. 5 kg
Material	ABS plastic
Mounting	Wall
Output signal	0.775Vrms / 0dB
Sensivity microphone	200 ohm / 0,5mV
Connections	Plugable screw terminals for 2.5 mm2 cable
Cable glands	2 x PG-16
Cable size	6 x 2 x 0.75mm2
Protection	IP-66
Operating temperature	-25°C TO +55°C
Environmental Condition	Exposed

Accessories



P-66

Handheld Microphone Waterproof

P-66/10

Handheld Microphone with 10-Meter Cable Waterproof