

2131000137

# **BSWT-6T**

On-wall speaker, 100V, IP65, 6W

## Description


- Made for marine environment
- Good audio quality
- Corrosion-free plastic enclosure
- Cable entry in the bottom or from the back
- An integrated gasket enables watertight mounting without cable glands when using the rear cable entry
- Adjustable power tapping to accommodate separate room sizes
- Supports loop wiring with double cable entries
- Includes thermal fuse, ceramic terminals and transformer for 100V lines

The Vingtor-Stentofon on-wall watertight speaker BSWT-6T is made for demanding environments. The speaker is well suited for marine usage with water ingress protection from all sides.

page 1/3

Using both cable entries facilitates loop-wiring and reduces the need for costly junction boxes.

### **Technical Dimensions**

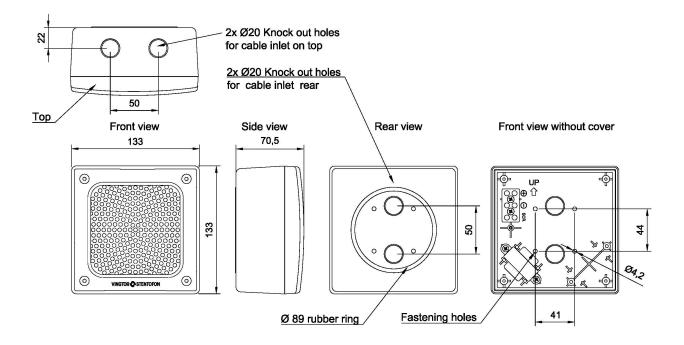

# **Specifications**

#### **GENERAL**

Dimensions (HxWxD)	133 x 133 x 70,5 mm
Woofer size	3"
Mounting	Screw Mount
IP rating	IP65
Operating temperature range	-20 ~ + 70
Rated Power	6W
Max Power	10W
Power tappings	6-3-1.5W
Sensitivity SPL 1W / 1m	89dB
Sensitivity Max SPL, 1m	97dB
Rated Voltage	100V
Frequency range	150 ~ 16 KHZ
Termination	Ceramic Terminal Block With thermal fuse
Color	White RAL 9010
Weight	0.68 kg
Environmental Condition	Protected