zenitel

DATASHEET



3006200028

VSP-212M-L

Main Station Panel Mounted with Relay 20-Way

- 20 stations system
- 2 positions group selector switch
- 10 position line selector switch
- Built-in relay latch timer for activation of external visible or audible 24VDC signal units
- Alarm stop button
- Noise compensated microphone
- Optical LED call indication at front (in addition to audible call signal)
- Flush mounted
- Wall mounting with corresponding metal cabinet type MBOKS-G
- Desk mounting with corresponding wooden cabinet type VSPC-OAK

IP44

Description

VSP-212M-L Main Station: 20-way Batteryless Communication for Vessels

The VSP-212M-L Main Station is an integral part of our 20-Way Batteryless Telephone System, designed to offer clear and uninterrupted communication in various maritime environments. Its design and features cater to ships looking for a sturdy and reliable communication system.
Features include:

- Versatile Mounting Options: Can be flush-mounted, wall-mounted, or desk-mounted to fit different spaces and needs.
- External Signal Activation: Comes with a built-in relay latch timer for external visible or audible signals, enhancing safety alerts.
- Noise-Compensated Microphone: Ensures clear communication in noisy areas, such as engine rooms.

Suitable for control rooms and areas with high ambient noise, the VSP-212M-L ensures compliance with safety communication requirements onboard.


Technical Dimensions

www.zenitel.com info@zenitel.com

Last revision date: 2026-08-27 13:46

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

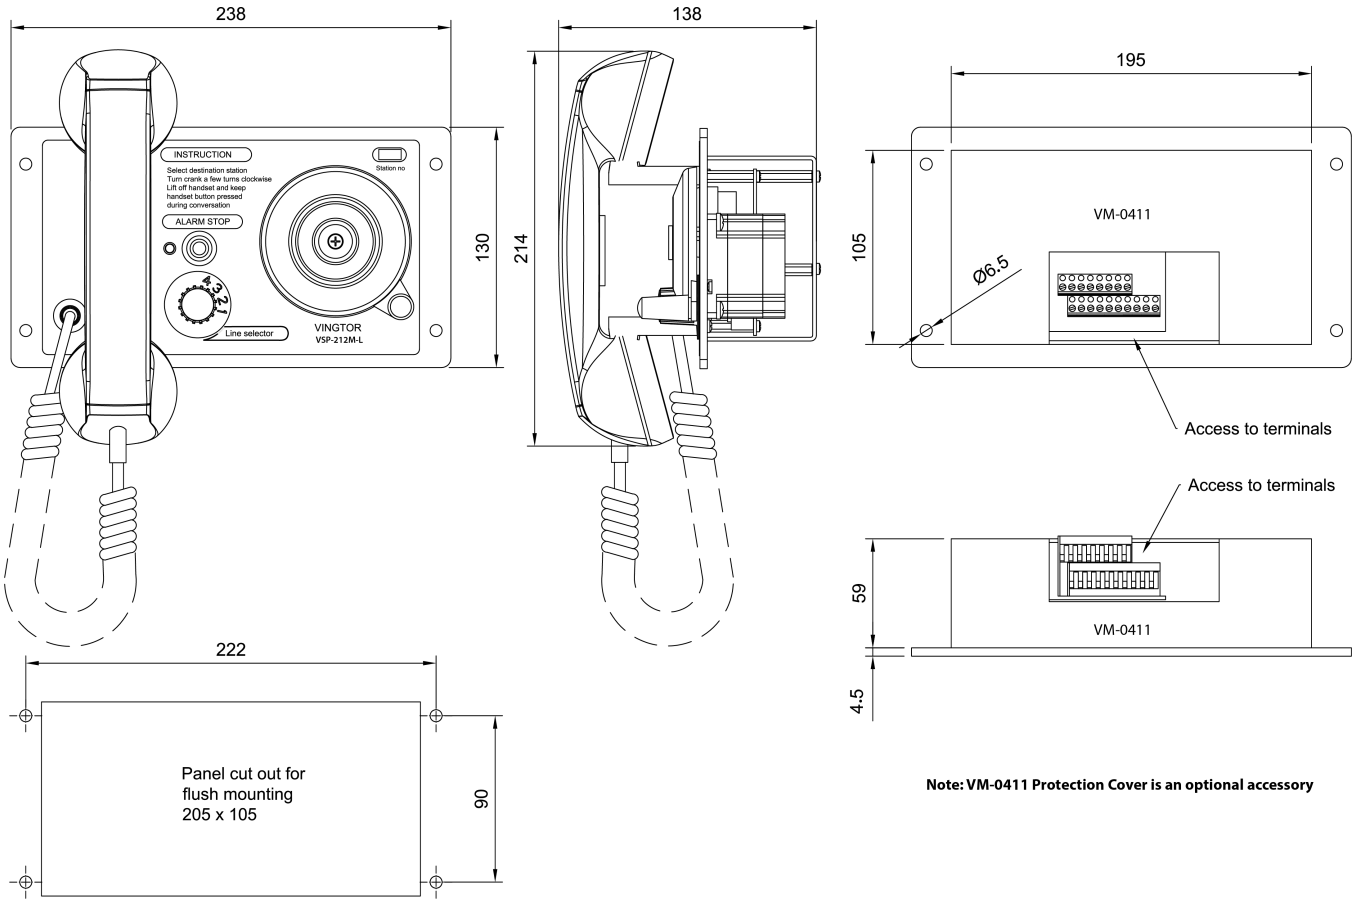

Note: VM-0411 Protection Cover is an optional accessory

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.

Specifications

GENERAL	
Connections	Screw terminals
Relay switching capacity (max)	4A
Colour	Black
IP rating	IP-44
Dimensions	238 x 130 x 77 mm
Panel cut-out	205 x 105 mm
Weight	1.30 kg
Operating temperature range	-25°C to 55°C
Compass Safe Distance	> 155cm

Accessories



VM-0411

Protection cover for VSP-stations

Item Number: 3006090492



MBOKS-G

VSP Batteryless Telephone System

Item Number: 3006090578



VSPC

MDF Cabinet with OAK embossed Vinyl laminate

Item Number: 3006200062



VSP-36-PEL-A

Headset with boom mic, headband, and 10m cable

Item Number: 1020600771

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.



VSP-36-PEL-A/20

Headset with boom mic, headband, and 20m cable

Item Number: 1020600772



CD-4

Plugbox Waterproof

Item Number: 1020159000



VSP-36-PELP-A

Headset with boom mic, headband, and 10m cable

Item Number: 1020600773



VSP-36-PELP-A/20

Headset with boom mic, headband, and 20m cable

Item Number: 1020600774



IRR-VSPM-24

Relay box 24V DC for VSP M

Item Number: 3006200005



IRR-VSPM-220

Relay Box 220V AC for 20 Way system

Item Number: 3006200004

Zenitel and its subsidiaries assume no responsibility for any errors that may appear in this publication, or for damages arising from the information therein. Zenitel products are developed and marketed by Zenitel. The company's Quality Assurance System is certified to meet the requirements in NS-EN ISO 9001. Zenitel reserves the right to modify designs and alter specifications without notice.

ZENITEL PROPRIETARY. This document and its supplementing elements, contain Zenitel or third party information which is proprietary and confidential. Any disclosure, copying, distribution or use is prohibited, if not otherwise explicitly agreed in writing with Zenitel. Any authorized reproduction, in part or in whole, must include this legend; Zenitel – All rights reserved.