

2131000155

## BPF-660T-MED

Ceiling speaker, 100V, IP54, 6W



- ✓ 70V / 100V line
- ✓ Tapping: 0,5W - 1,5W - 3W - 6W
- ✓ MED approved



MED Certification



IP54

## Description


Our new improved mounting system makes this the most flexible 6" ceiling speaker DNH A/S has made. The hooks are changeable to set upside down, allowing up to 55 mm on the ceiling thickness. The easy mounted dust box has a M20 gland and a M20 blanking plug on the side as standard.

## Installation, Operation and Maintenance Procedures

- ✓ Install the ring into the cutout hole turning the crews connected to the three hooks, screw clockwise until the ring is fixed to the ceiling.
- ✓ Open box by one screw, lead cable through cable gland, connect to terminal (70V or 100V) and select required tapping on transformer.
- ✓ Screw box back into place with one screw.

- ✓ Turn the grille gently clockwise within the ring until it stops.
- ✓ Hooks can be mounted both ways, see drawing at top of the page.
- ✓ For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- ✓ Do not open loudspeaker when energized.
- ✓ This loudspeaker is supplied with two years warranty against defective workmanship.

## Technical Dimensions

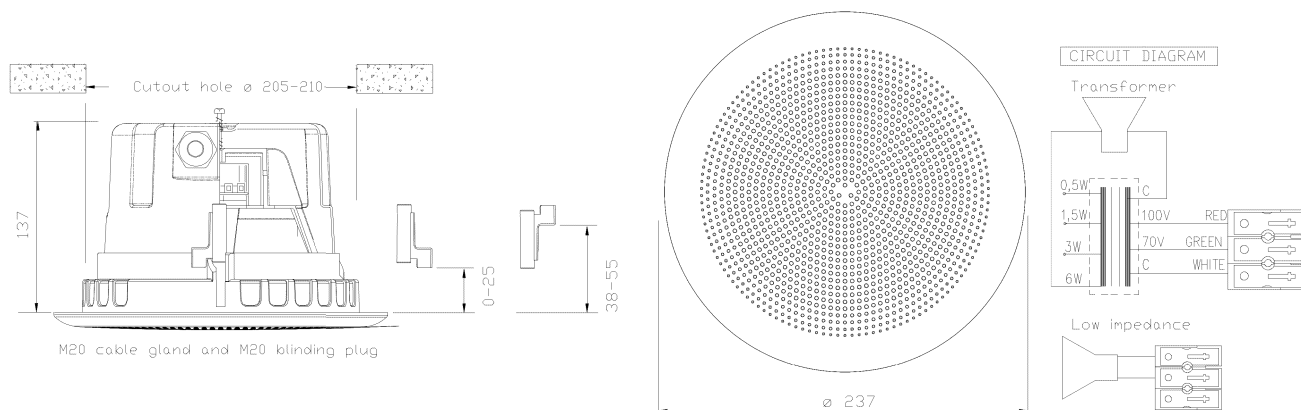

# Specifications

## GENERAL

Material/Colour	PA-6 V0/ ABS / RAL9010
Mounting	Hooks
Termination	Spring clamp
Weight	1,3 kg
Max./min.amb.temp	90°C / -20°C
Rated power	6W
SPL 1W/1m	93 db
SPL Rated Power	100 db
Effective freq. Range	170 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz	155° / 125° (baffle)
Size	(Diam x D): 237 x 137 mm
IP Rating	IP54
Environmental Condition	Protected